



30mm Riflescope Mount

User Manual

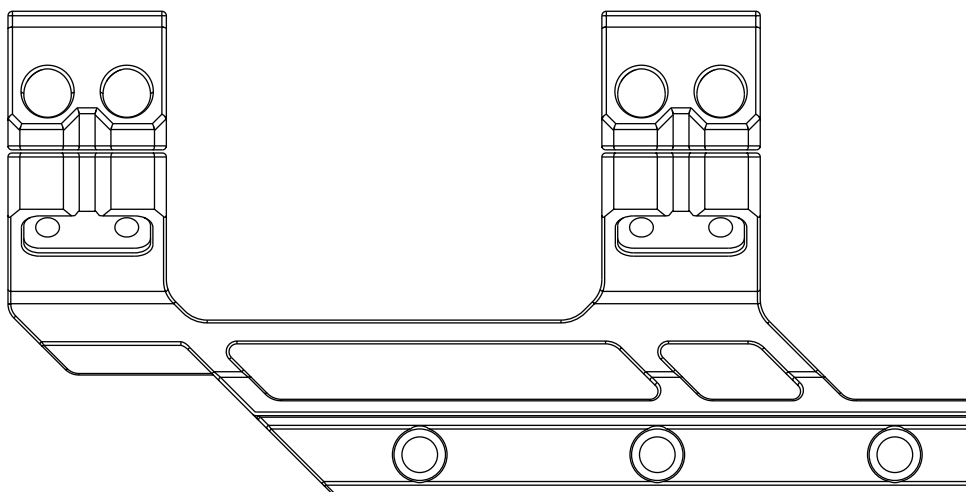

Read Carefully Before Use
Keep for Future Reference


Specifications

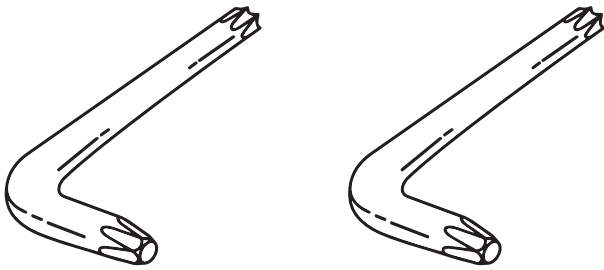Material	Aluminum Alloy 7075	
Color	Black	
Dimensions	4.8×1.65×2.44 (in.)	12.2×4.2×6.2 (cm)
Compatible Scope Tube Diameter	1.18 in.	30 mm
Compatible Rail	Picatinny	
Weight	0.4 lb.	187 g
Accessories	Torx Wrench ×2 	

Assembly

Danger

- Check that there is **NO AMMUNITION** inside the barrel and magazine before mounting.
- Check that this scope mount is compatible with your gun-scope combination.

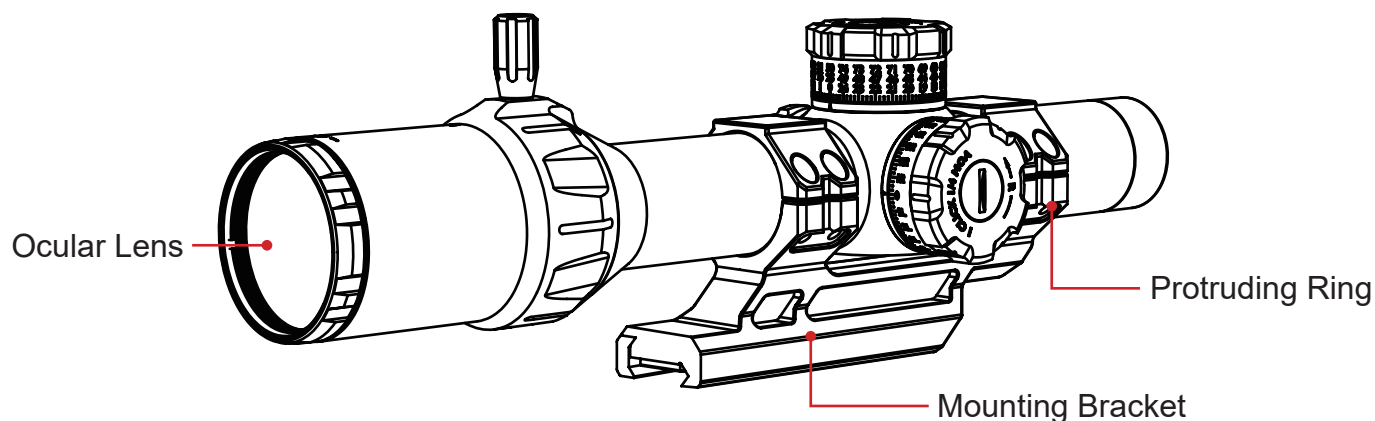

1. Place the mounting bracket on the rail, making sure the protruding ring faces the barrel instead of the stock.
2. Fix the mounting bracket using another wrench if the provided one doesn't fit.
3. Remove the 8 torx bolts on the rings of the mounting bracket by using the provided torx wrench. Then remove the upper halves of the rings.
4. Place the scope on the lower halves the rings.
5. Set the riflescope to its highest magnification.
6. Move the riflescope fore and aft in the rings until you achieve a full, unobstructed view down the scope.
7. Without disturbing the fore-aft placement, rotate the riflescope to align the reticle horizontally and vertically.

Use leveling tools such as feeler gauges or bubble levels and a plumb bob for help.

8. Replace the upper halves of the rings and tighten with the removed torx bolts to their stated torque values.

Warning

Always torque the bolts down to their stated torques. Insufficient torquing can lead to a blurry view due to recoil; over-torquing can damage the structure of the scope.

Contact Us

Thank you for choosing our products! If you have any questions or comments, contact us at **support@gogunnr.com** and we'll resolve your issue ASAP!

For a .pdf copy of the latest version of these instructions, use the appropriate app on your smartphone to scan the QR code to the right.

