

USER MANUAL

IN THE BOX

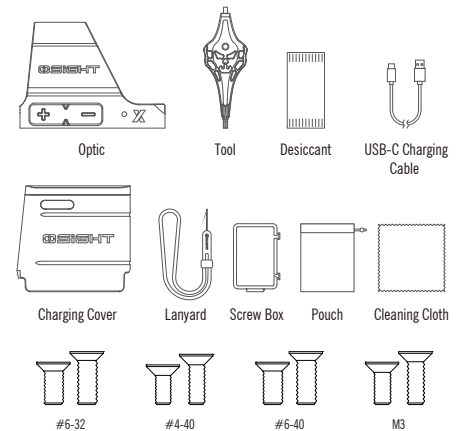


Table 1: Optic SPECIFICATIONS

Mode	6300H	7700H	7800H
Brightness	170 mW 3.87 V 0.86 mA	1.0 m	IP65
Working Temperature	25°C ~ 35°C (77°F ~ 95°F)		
Dimensions	45.1 x 30.3 x 23.0 mm (1.77" x 1.19" x 0.91")		
Weight	46.1 g (1.62 oz)		

Table 2: O Sight X Charging Cover

Main Body	Plastic+Al6061
Dimensions	47*35*44 mm / 1.85*1.38*1.73 in
Weight	58 g / 1.76 oz
Battery Capacity	800 mAh 3.87 V (3.1 Wh)
Input	DC 5V / 2.1 A (MAX)
Output	DC 4.45V / 0.1 A (MAX)
Time to Fully Charge the Optic	2.5 H

Table 3: USB-C Charging Cable

Charge Type	USB-C
Cable Length	0.8 m
Input	5V/2A

Table 4: Optic Operation Instructions

Mode	6300H	7700H	7800H
Brightness	170 mW 3.87 V 0.86 mA	1.0 m	IP65
Working Temperature	25°C ~ 35°C (77°F ~ 95°F)		
Dimensions	45.1 x 30.3 x 23.0 mm (1.77" x 1.19" x 0.91")		
Weight	46.1 g (1.62 oz)		

Table 5: Optic Operation Instructions

Mode	6300H	7700H	7800H
Brightness	170 mW 3.87 V 0.86 mA	1.0 m	IP65
Working Temperature	25°C ~ 35°C (77°F ~ 95°F)		
Dimensions	45.1 x 30.3 x 23.0 mm (1.77" x 1.19" x 0.91")		
Weight	46.1 g (1.62 oz)		

Table 6: Optic Operation Instructions

Mode	6300H	7700H	7800H
Brightness	170 mW 3.87 V 0.86 mA	1.0 m	IP65
Working Temperature	25°C ~ 35°C (77°F ~ 95°F)		
Dimensions	45.1 x 30.3 x 23.0 mm (1.77" x 1.19" x 0.91")		
Weight	46.1 g (1.62 oz)		

Table 7: Optic Operation Instructions

Mode	6300H	7700H	7800H
Brightness	170 mW 3.87 V 0.86 mA	1.0 m	IP65
Working Temperature	25°C ~ 35°C (77°F ~ 95°F)		
Dimensions	45.1 x 30.3 x 23.0 mm (1.77" x 1.19" x 0.91")		
Weight	46.1 g (1.62 oz)		

Figure 1 Product Overview

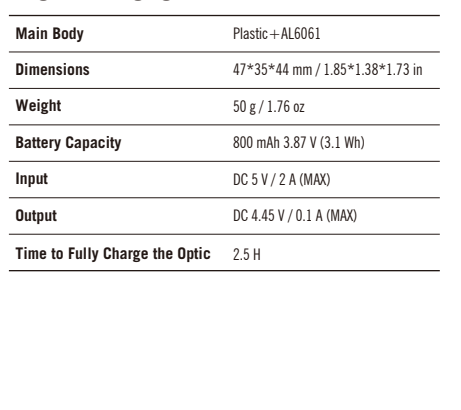


Figure 2 Charge the Charging Cover

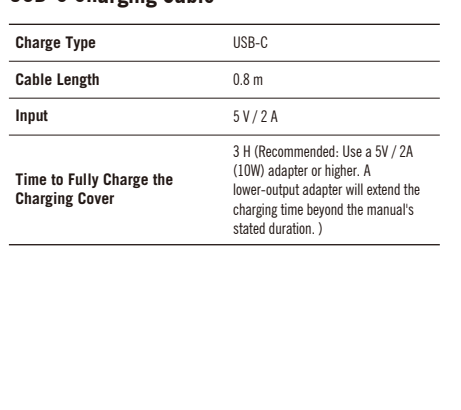


Figure 3 Charge the Optic With the Cover

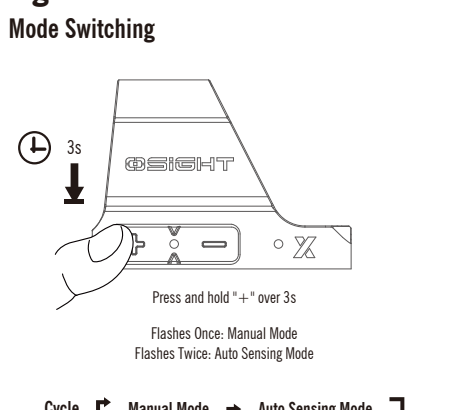


Figure 4 Manual On

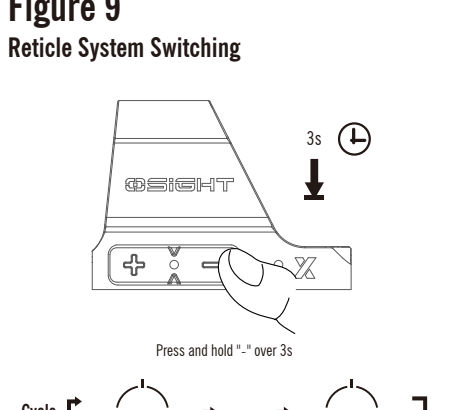


Figure 5 Manual Off

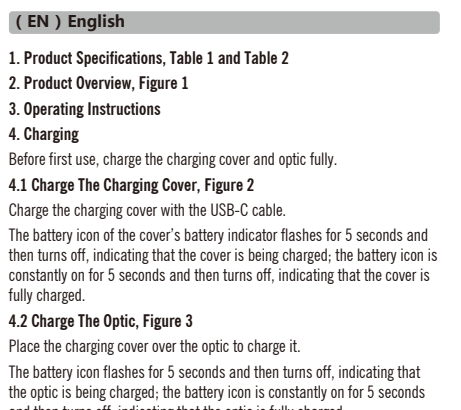


Figure 6 Motion Sensor Function On/Off

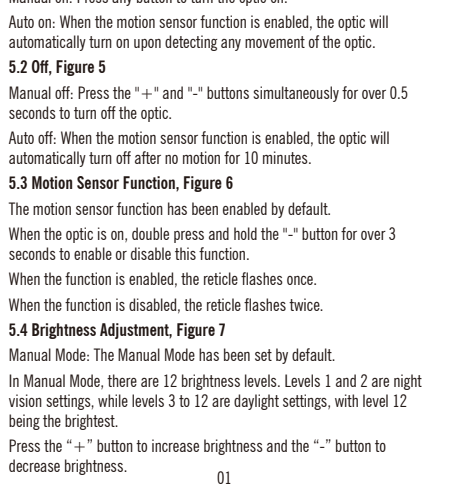


Figure 7 Brightness Adjustment (Manual Mode)

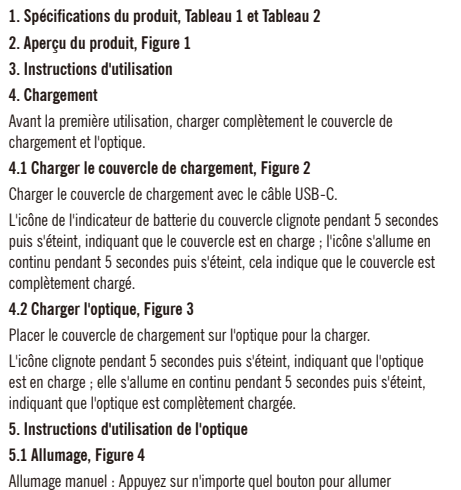


Figure 8 Mode Switching

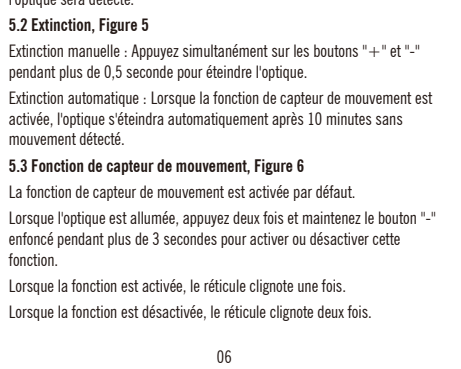


Figure 9 Reticle System Switching

Figure 10 Energy-Saving Function

Figure 11 Battery Indicators

Figure 12 How to Install

Figure 13 Zero Setting

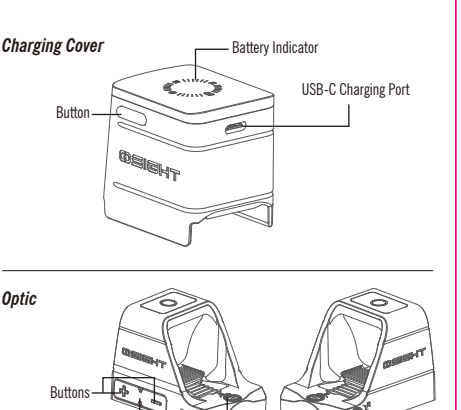


Figure 14

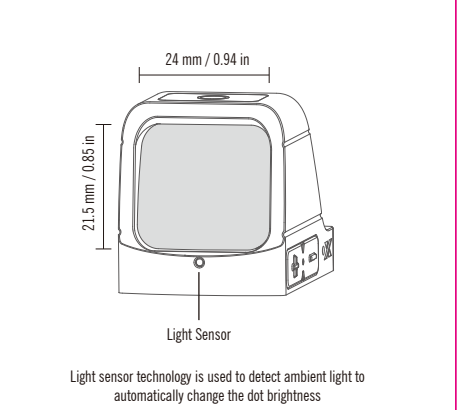


Figure 15

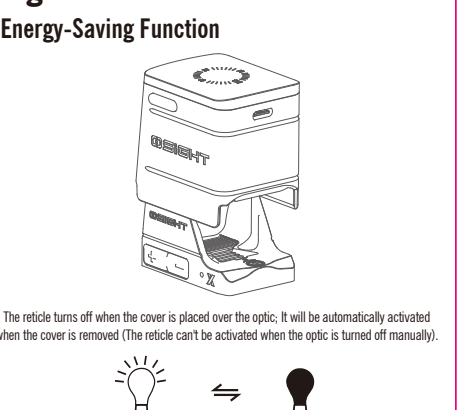


Figure 16

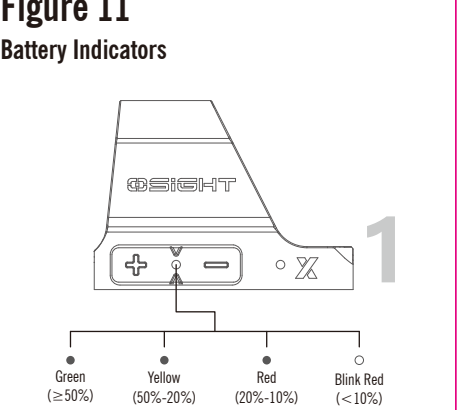


Figure 17

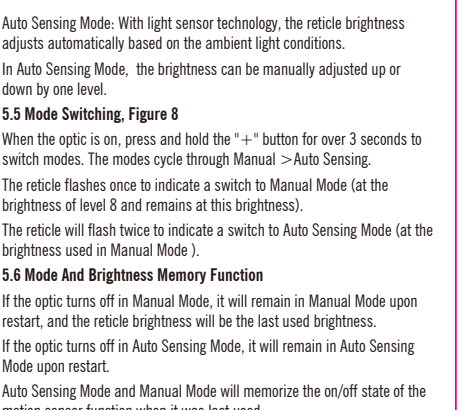


Figure 18

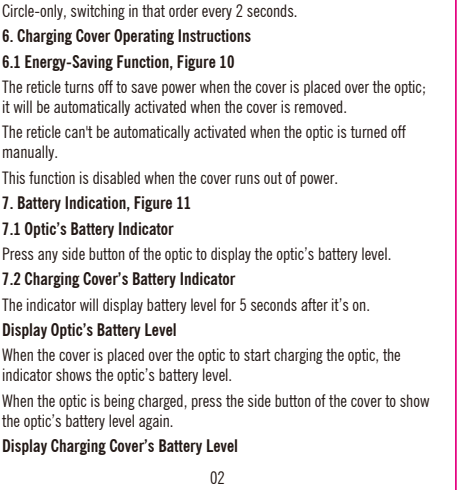


Figure 19

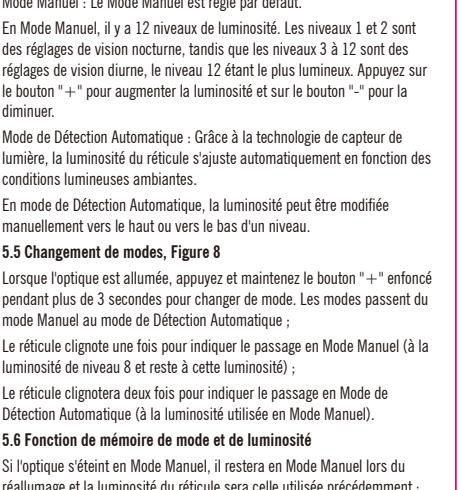


Figure 20

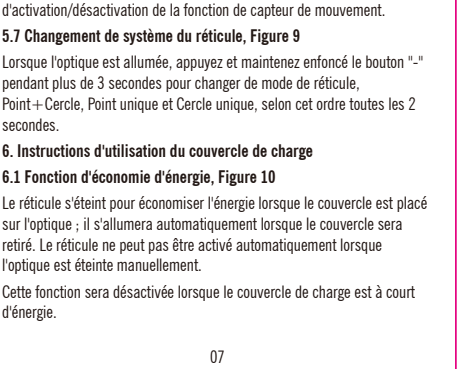


Figure 21

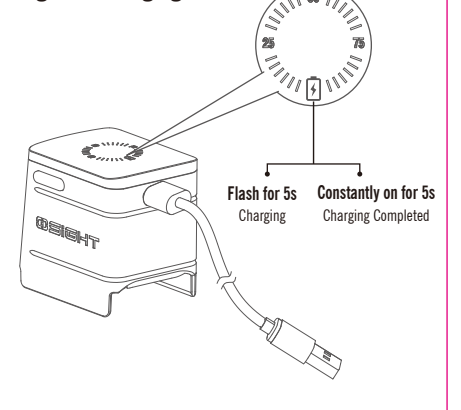


Figure 22

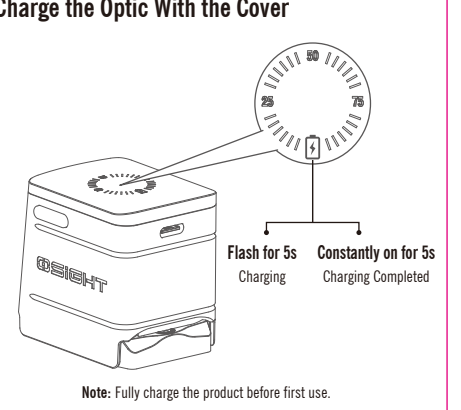


Figure 23

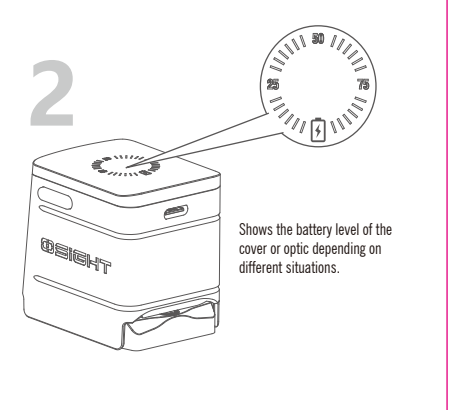


Figure 24

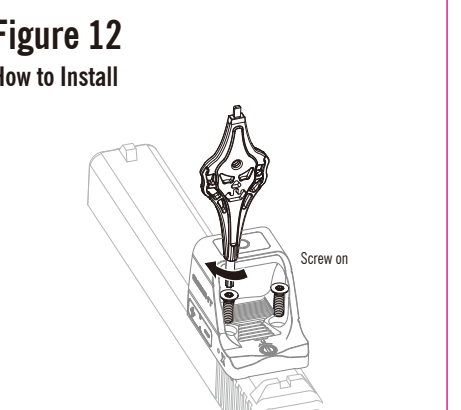


Figure 25

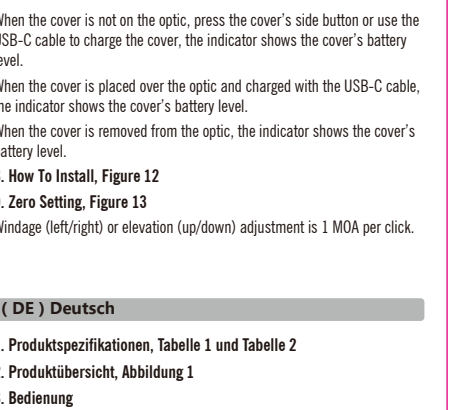


Figure 26

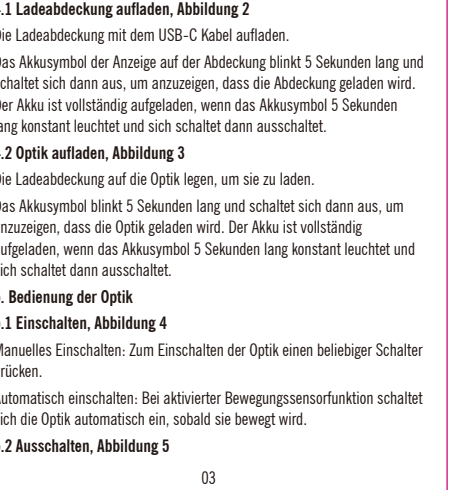


Figure 27

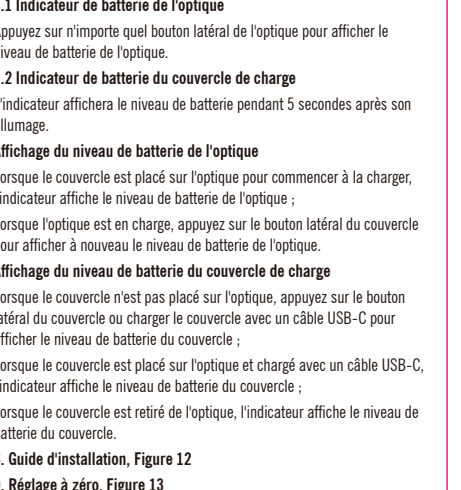


Figure 28

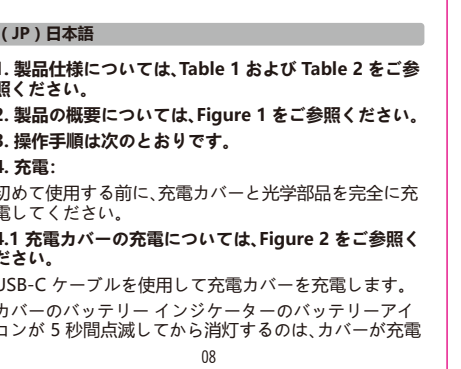


Figure 29

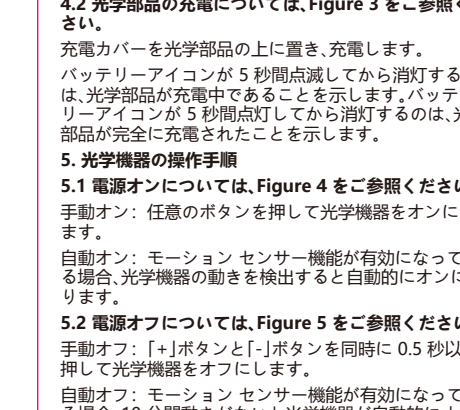


Figure 30

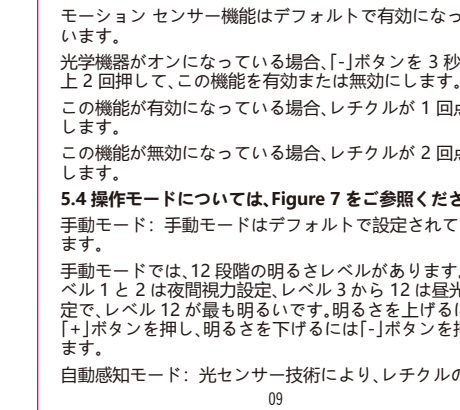


Figure 31

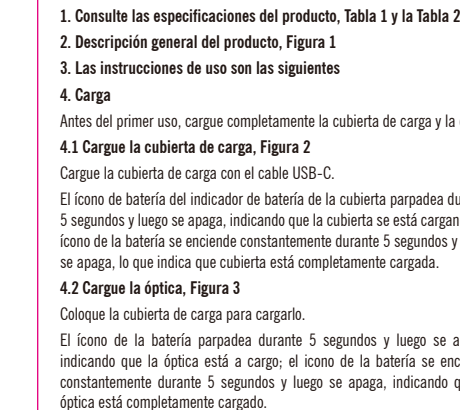


Figure 32

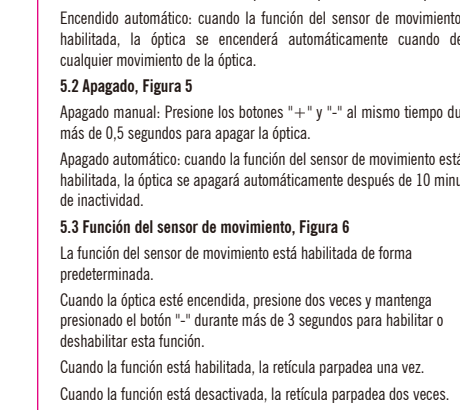


Figure 33

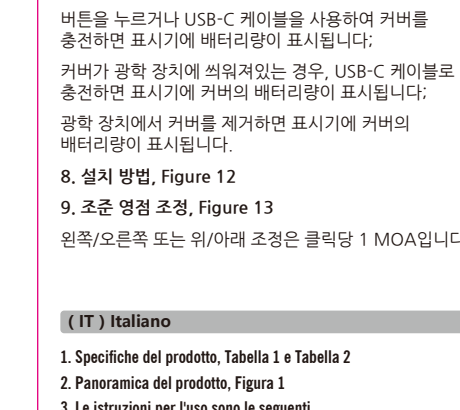


Figure 34

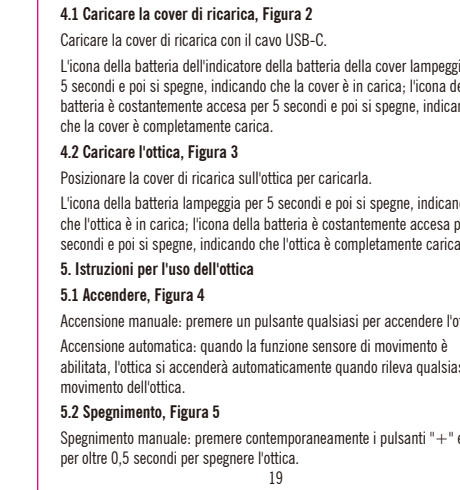


Figure 35

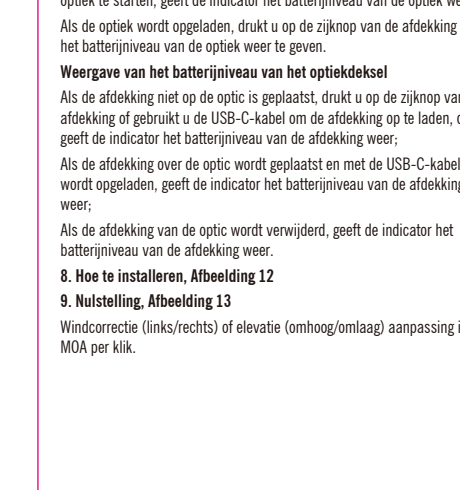


Figure 36



Figure 37

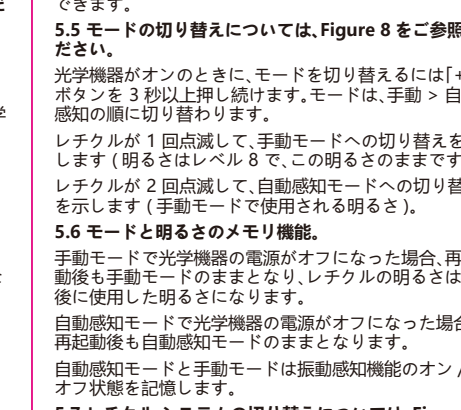


Figure 38

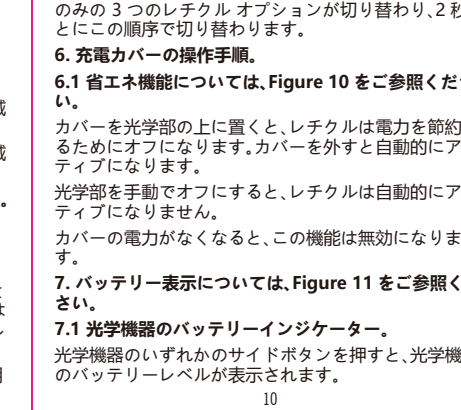


Figure 39

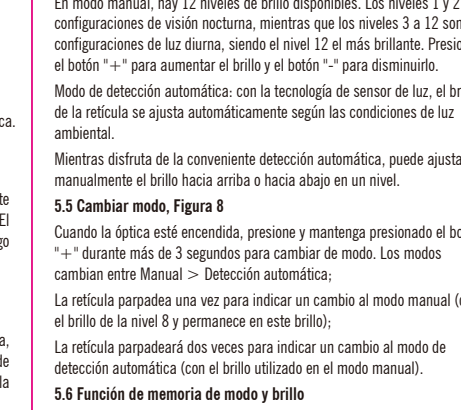


Figure 40

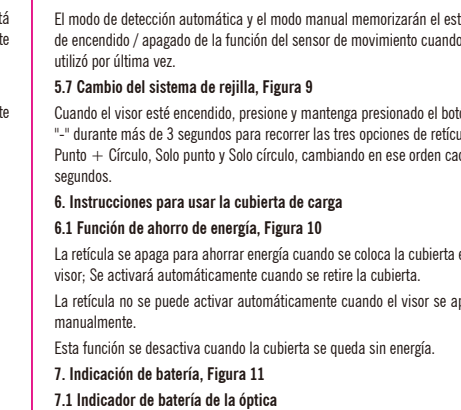


Figure 41

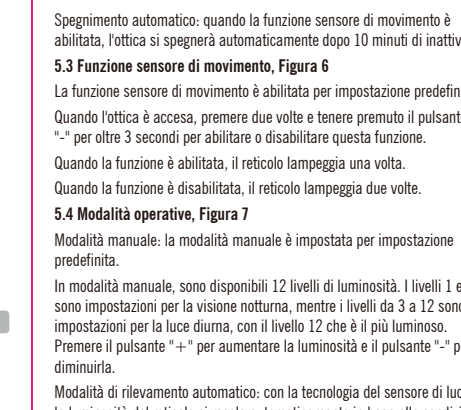


Figure 42

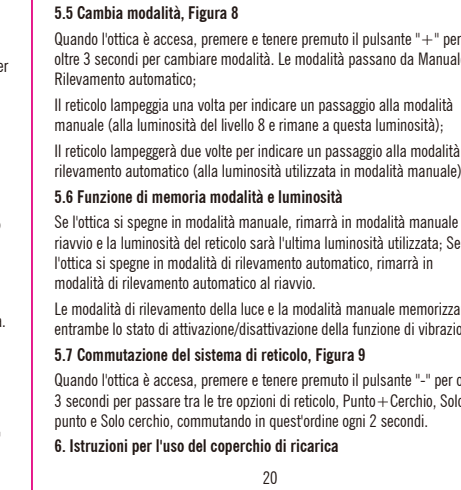


Figure 43

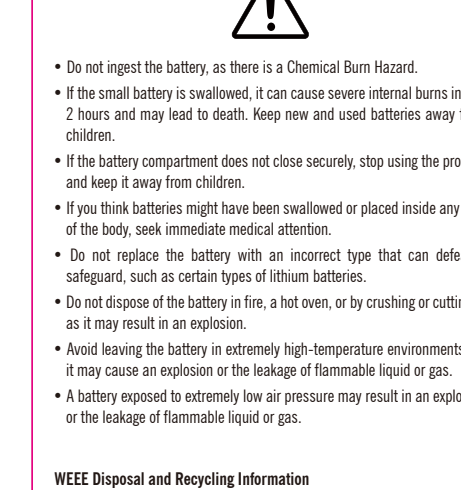


Figure 44

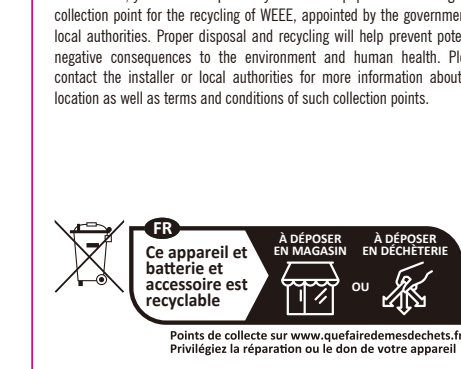


Figure 45

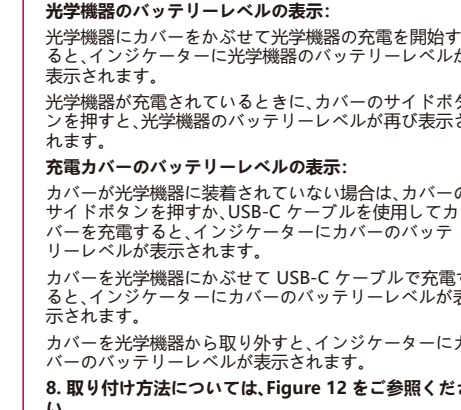


Figure 46

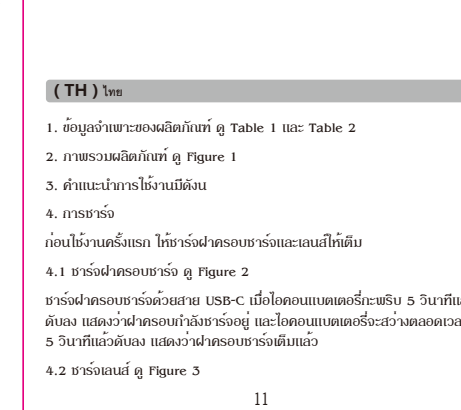


Figure 47

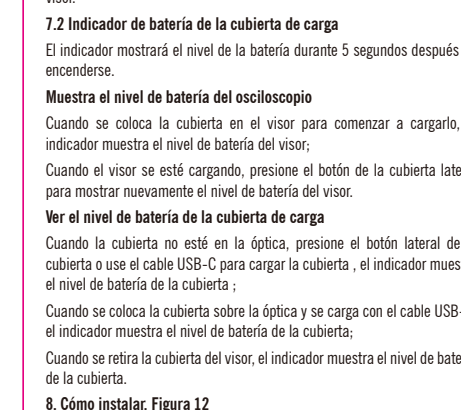


Figure 48

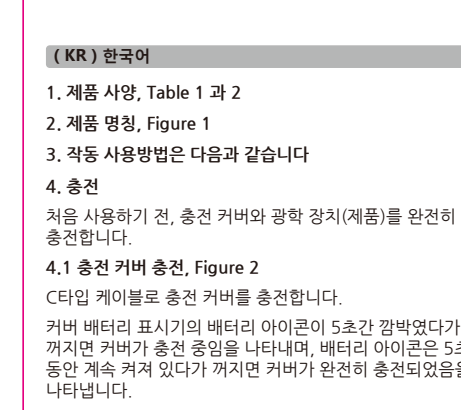


Figure 49

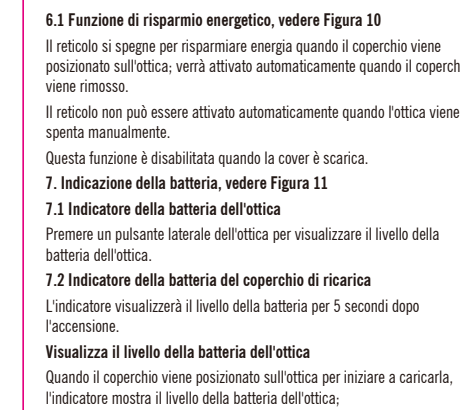


Figure 50

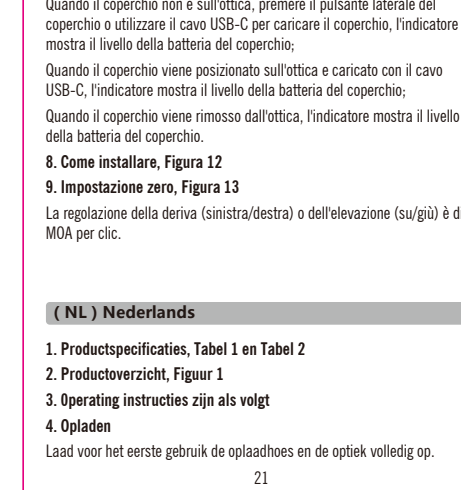


Figure 51

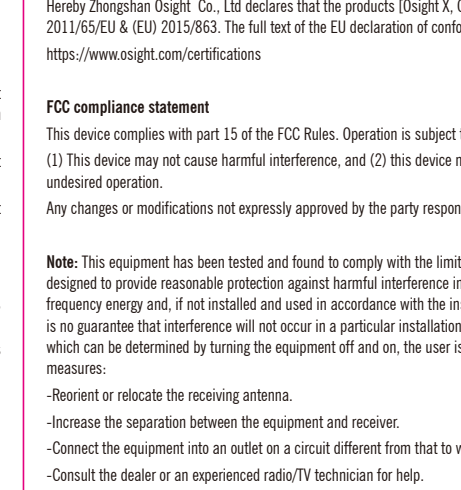


Figure 52

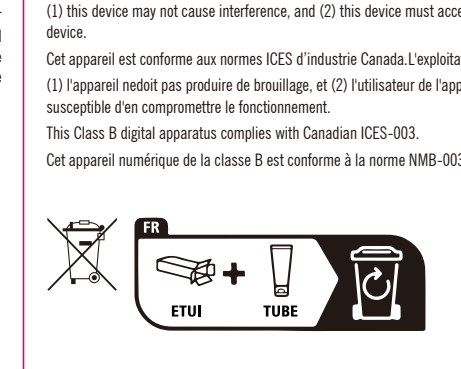


Figure 53

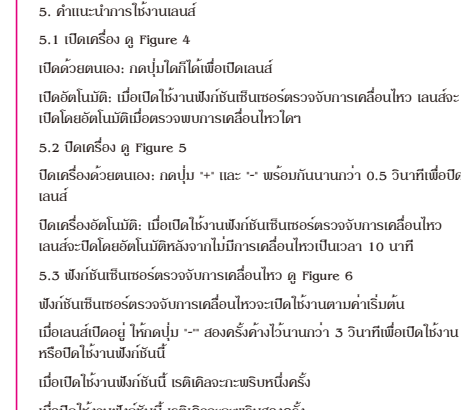


Figure 54

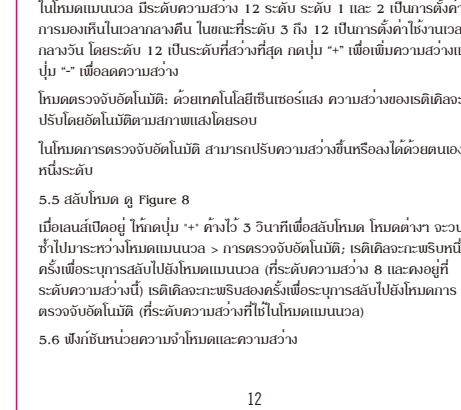


Figure 55

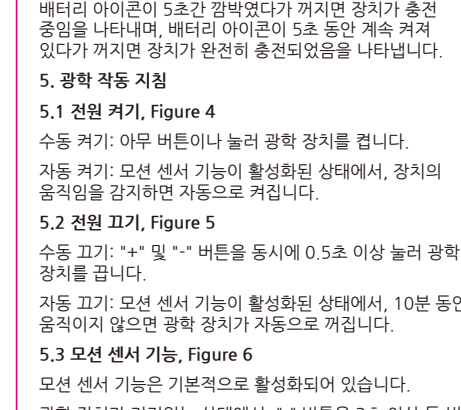


Figure 56

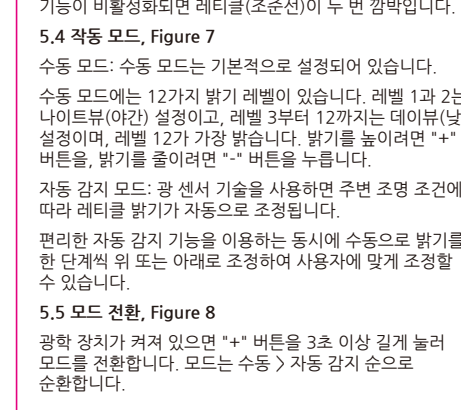


Figure 57

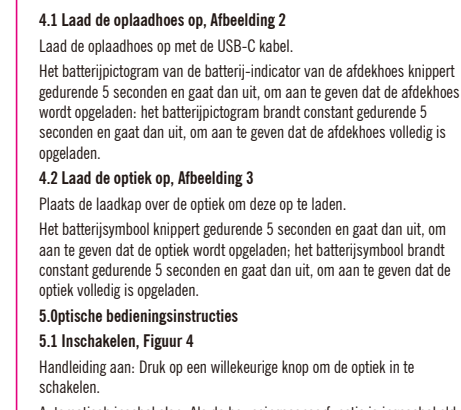


Figure 58

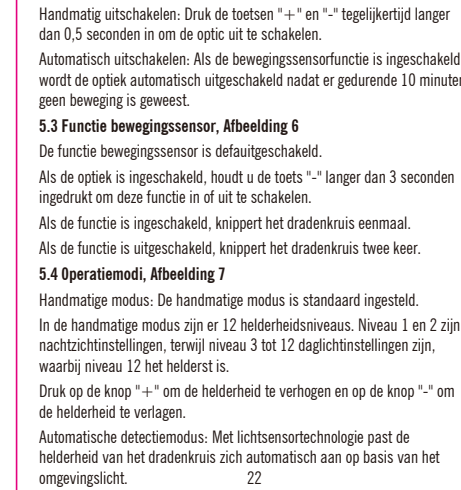


Figure 59

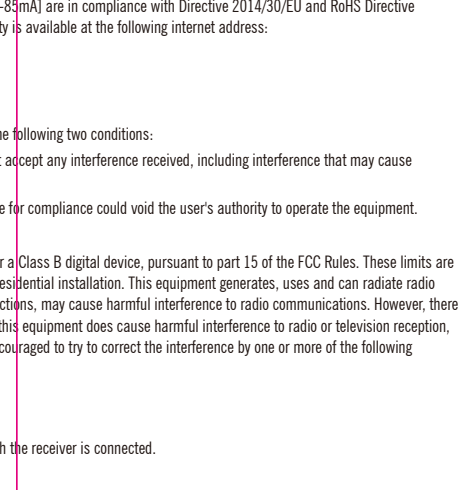


Figure 60

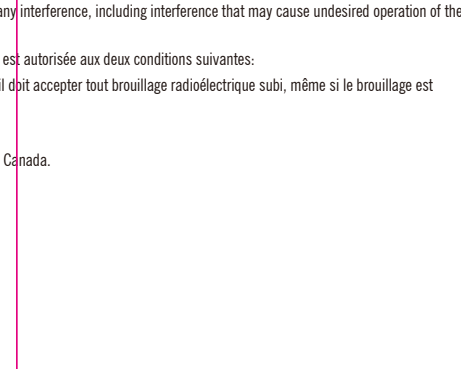


Figure 61

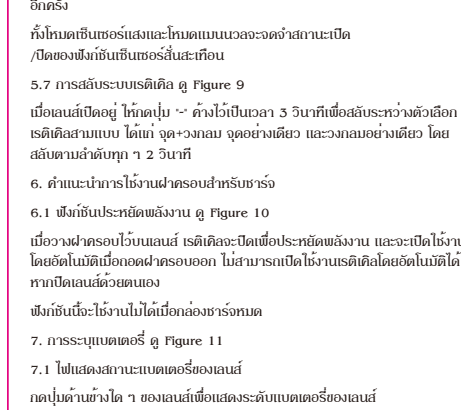


Figure 62

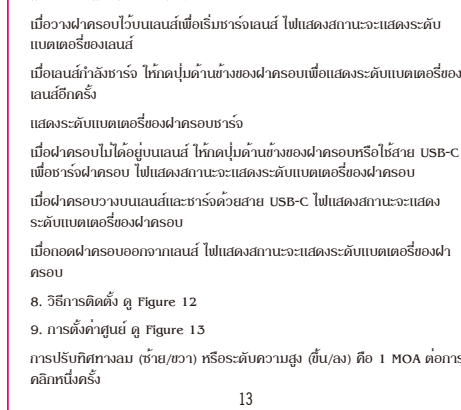


Figure 63

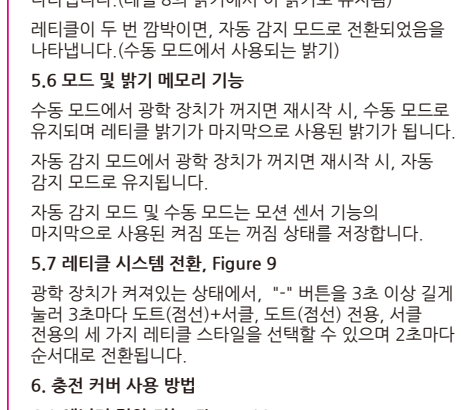


Figure 64

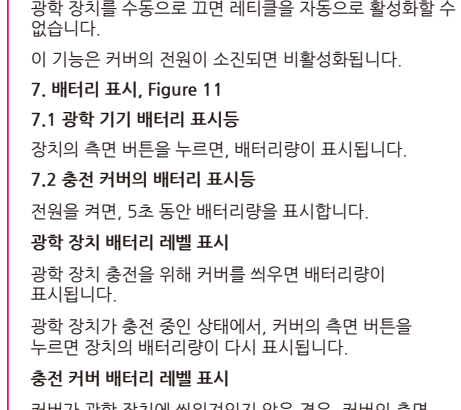


Figure 65

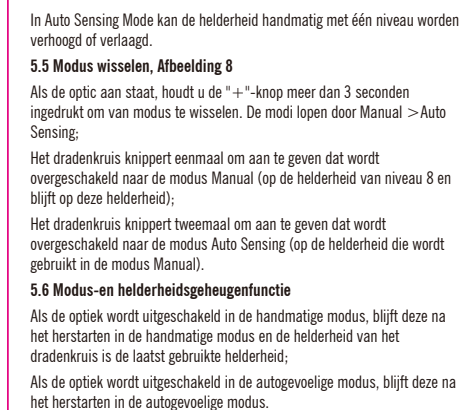


Figure 66

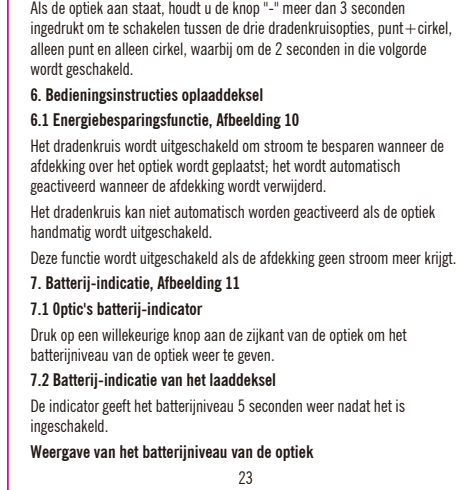


Figure 67



Figure 68

