


AR15 TOOL™

USER GUIDE & WARRANTY

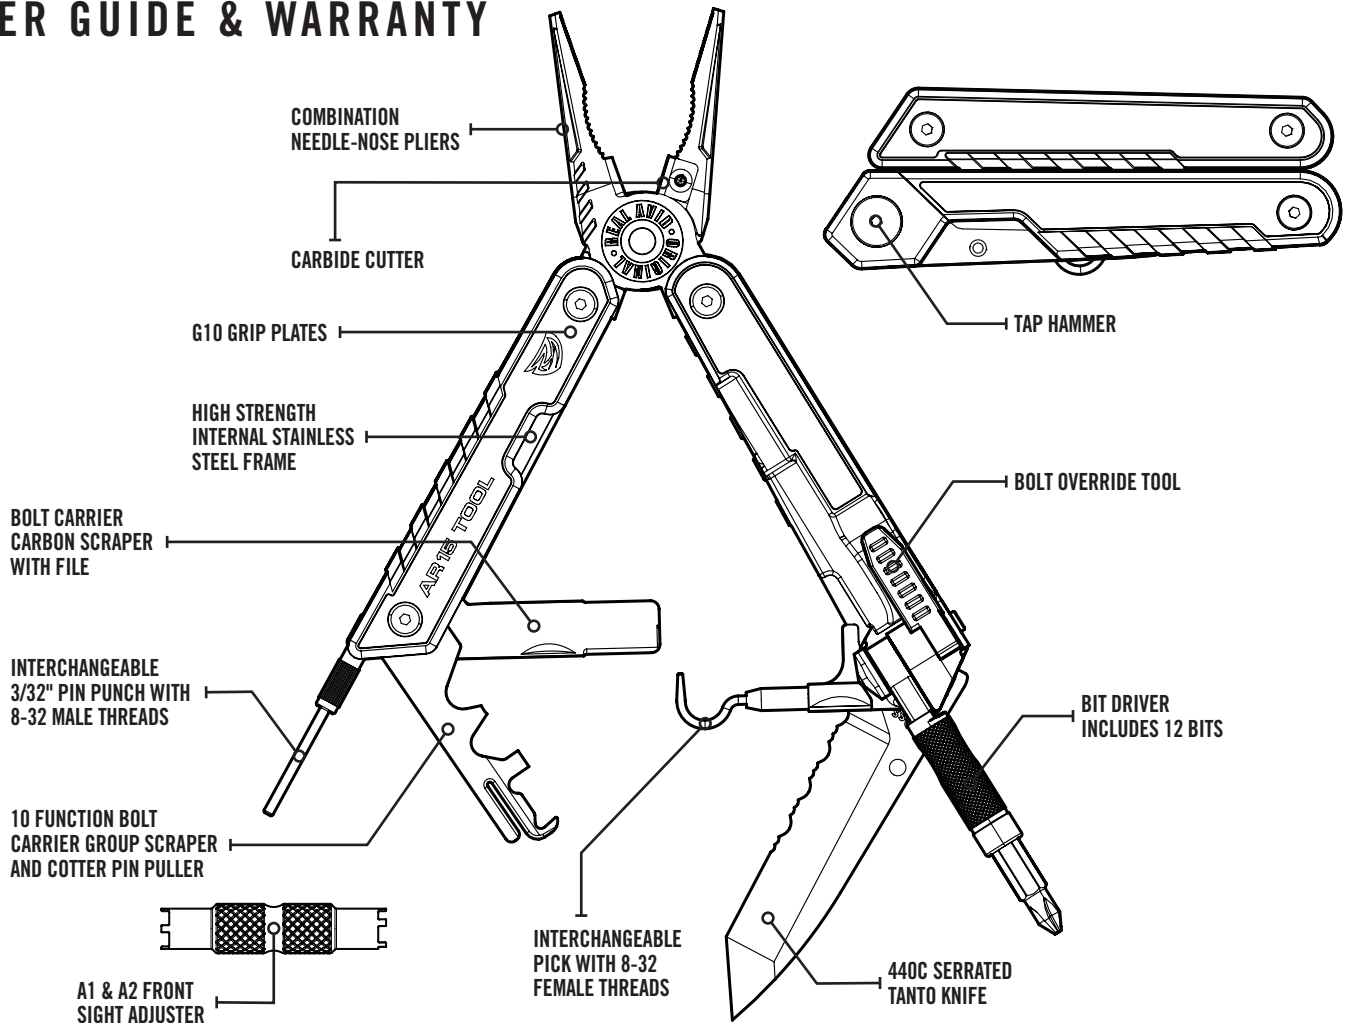

JAWS: The combination needle-nose pliers are made to get a grip during any situation. Their highly functional shape allows for fine work with the tip as well as bigger, more aggressive tasks towards the back of the jaws. The carbide cutter is designed to cut most common gauges of copper wire.

KNIFE BLADE: The tanto style knife blade is made from high quality 440C stainless steel and comes with a durable black oxide coating. Exercise caution as the blade is very sharp. Also, make sure that the liner lock is firmly engaged before use. Only re-sharpen the blade with a carbide or ceramic sharpener following the sharpener manufacturer's instructions. When sharpening the serrations make sure to use an appropriately sized rod-shaped knife sharpener.

BOLT OVERRIDE TOOL: The bolt override tool can be used to clear jammed cartridges that get stuck between the bolt carrier group and the charging handle. Carefully engage the firearm's safety, remove the magazine, pull the bolt carrier group back using the override tool and dislodge the stuck cartridge from the firearm.

INTERCHANGEABLE PIN PUNCH: Check fitment of pin punch to all pin diameters before applying pressure. Never forcefully hammer on this tool to remove a stuck or jammed pin. If necessary, the tap hammer may be used on the pin punch with light force to ease a snug pin in or out of its location. The pin punch is threaded to the tool with common 8-32 threads. The pin punch may also be removed and replaced with any other 8-32 male threaded implement.

INTERCHANGEABLE PICK: The pick is designed to reach into tight places throughout an AR15. Use it for everything from gently removing stubborn deposits of carbon, to pulling cotter pins. The pick is threaded to the tool with common 8-32 threads. The pick may also be removed and replaced with any other 8-32 female threaded implement.

BIT DRIVER: The folding bit driver, along with the six double-sided bits, can be used for a variety of applications. Make sure to hold the bit driver firmly and do not exert excessive torque on the tool at any time. Be careful to avoid off-axis pressure, which can cause the driver to close unintentionally.

AR15 FRONT SIGHT ADJUSTER TOOL: The sight adjuster can be used on both A2 and A1 style (4 and 5 pin) front sights. Simply engage all of the teeth evenly with the front sight post and apply firm pressure. With the detent pin depressed the front sight post can be rotated to the proper height to account for distance and elevation changes. We recommend storing the front sight adjuster in the side sheath pocket for protection.

