

HUNTING

H6Xi



GERMAN PRECISION.  
AMERICAN MADE.

THE H6XI RIFLESCOPES  
SERIES OFFERS,  
THE ULTIMATE  
COMBINATION OF  
PRECISION,  
RUGGEDNESS AND  
VERSATILITY.

**H6XI-SERIES  
OVERALL FEATURES**

- BORN FROM THE T6XI
- MADE IN AMERICA
- FIRST FOCAL PLANE
- MODERN HUNTER RETICLE
- 92% LIGHT TRANSMISSION
- HD GLASS
- WIDE FIELD OF VIEW
- LIGHTWEIGHT DESIGN
- 6X OPTICAL SYSTEM
- 3 MAGNIFICATIONS
- FINE PARALLAX DOWN TO 25 YARDS
- LOCKING DIOPTER



H6Xi 5-30X50

TUBE DIAMETER 30 MM | LENGTH 15.4 IN. | BATTERY CR2032  
ITEM NO. 8789 (MHR) | UPC 000381887894



H6Xi 3-18X50


TUBE DIAMETER 30 MM | LENGTH 13.3 IN. | BATTERY CR2032  
ITEM NO. 8786 (MHR) | UPC 000381887863



H6Xi 2-12X42

TUBE DIAMETER 30 MM | LENGTH 11.8 IN. | BATTERY CR2032  
ITEM NO. 8780 (MHR) | UPC 000381887801



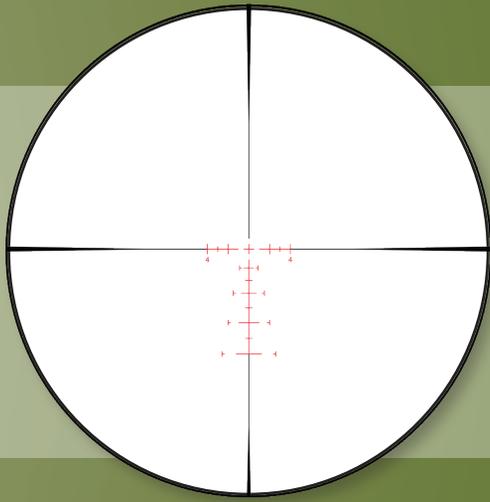

### THE NEW STEINER MHR RETICLE

The H6Xi series of riflescopes feature illuminated reticles for optimum viewing in low light or on dark targets. The rotary illumination dial is located on the left side of the riflescope adjacent to parallax adjustment.

There are 11 illumination intensity levels and a “battery saver” position in-between each level that turns off the illumination to prevent battery drain. Additionally, each level has a detent to prevent unintended changes during use.

## SPECIFICATIONS

	2-12x42mm	3-18x50 mm	5-30x50 mm
Item No.	8780	8786	8789
Magnification	2-12x	3-18x	5-30x
Objective Lens Diameter (mm)	42	50	50
Tube Diameter (mm)	30	30	30
Field of View (ft. @ 100 yds)	55 - 8.5	36-7	25 - 4.5
Field of View (ft. @ 100 m.)	48.5 - 9	40 - 7.5	24 - 4
Eye Relief (in./mm)	3.85-3.5 / 98-89.6	3.85-3.5 / 98-89.6	3.85-3.5 / 98-89.6
Exit Pupils (mm) LOW /HIGH	9.8 - 3.8	9.4 - 3.3	9.15 - 2.3
Diopter Setting	+2 to -3	+2 to -3	+2 to -3
Focal Plane	First	First	First
Reticle	Steiner MHR	Steiner MHR	Steiner MHR
Illumination	Rotary Dial	Rotary Dial	Rotary Dial
Battery	CR2032	CR2032	CR2032
Weight (w/o caps) (oz./G)	23.2 oz/650 g	27.4 oz/777 g	28.1 oz/796 g
Length (in./mm)	11.8 in	13.3 in	15.4 in
Operating Temperature	-13 °F / +145 °F	-13 °F / +145 °F	-13 °F / +145 °F
Click Value Adjustment	0.25 MOA	0.25 MOA	0.25 MOA
Total Elevation Range	70 MOA	75 MOA	65 MOA
Total Windage Range	70 MOA	50 MOA	30 MOA
Parallax Focus	Side Focus	Side Focus	Side Focus
Parallax/Focus Range	25yd to Infinity	25yd to Infinity	25yd to Infinity

Valid in U.S. and Canada only on items manufactured since 2014. Products manufactured prior to 2014 are covered by the warranty as stated on the original packaging.



We will repair or replace the product at no charge to you. The Steiner Heritage Warranty does not cover loss, theft, deliberate damage or cosmetic damage that does not hinder the performance of the product.

- No warranty card needed.
- No receipt required.
- Warranty is fully transferable to future owners of the product.



**STEINER**   
Nothing Escapes You

