


PRODUCT IDENTIFICATION

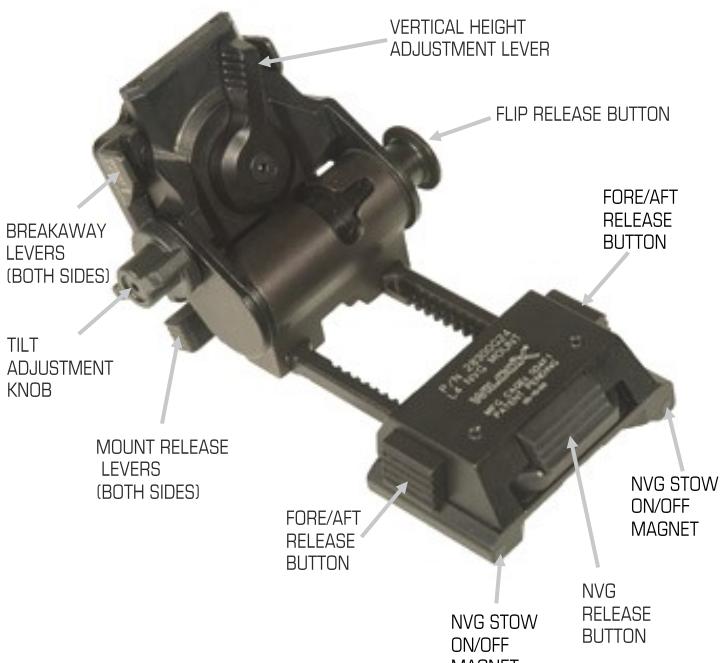


Features of the L⁴ G24 Mount

CARE AND MAINTENANCE

Clean the Mount by flushing away dirt with fresh water and/or wiping down the assemblies with a clean, damp cloth. If used in a salt water environment, flushing with fresh water and drying after use is recommended. If used extensively in a salt water environment, lightly lubricate stainless steel parts as needed.

Vertical and horizontal adjustment and release mechanisms that are not kept free from debris may bind, and the assembly may not lock the mount into the up or down position. Lubricate lightly as needed.

Check Tilt Adjustment and NVG Interface for any play in the mechanisms. If necessary, tighten the screws with a Hex Driver, as identified below.

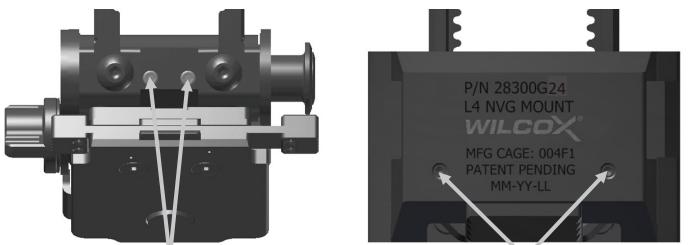

INSERT 1/16 HEX DRIVER TO
ADJUST; CCW TO LOOSEN,
CW TO TIGHTEN

INSERT .050 HEX DRIVER TO
ADJUST; CCW TO LOOSEN,
CW TO TIGHTEN

Tightening Tilt Adjustment Screws

Tightening NVG Interface Screws

WARRANTY STATEMENT

THIS WARRANTY LANGUAGE SUPERSEDES ANY PURCHASE ORDER/AGREEMENT WITH ANY RESELLER OR OEM. WILCOX INDUSTRIES CORP SPECIFICALLY DOES NOT AGREE TO ANY WARRANTY LANGUAGE OR TERMS THAT CONFLICTS WITH THE FOLLOWING:

Warranty for Wilcox products is honored for items purchased directly from Wilcox or an authorized dealer only. Items purchased via eCommerce such as Ebay, Craigslist and other online marketplaces are not eligible for the Wilcox warranty.

Based on the Magnuson-Moss Warranty Act, Wilcox Industries Corp. offers no express warranty on its product line. However, Wilcox Industries Corp. recognizes its obligation concerning implied warranty. Wilcox Industries Corp. will not warranty any Wilcox Industries Corp. mount failure if the Wilcox Industries Corp. Mount is not utilized with the specifically-designed and matched Wilcox Industries Corp. branded Shroud. Any reseller of Wilcox Industries Corp. Shrouds and mounts are required to accept responsibility for assuring no after-market pieces are utilized in combination with Wilcox Industries Corp. mounts, which could damage the Wilcox Industries units. Use of any after-market shroud(s) specifically voids any warranty by Wilcox Industries Corp. mount(s). Liability for damages to Wilcox Industries Corp. mount(s), and the resulting requirement by the End User to repair or replace, shall fall on the reseller in the event that adherence to this stipulation has failed. All requests for warranty replacement or repairs shall come directly from the end user, following the instructions below.

Wilcox Industries Corp. mounts will be serviced or replaced in accordance with the following schedule, at no cost to the purchaser for defects in materials or workmanship. Shipment will be made via UPS ground, prepaid to any continental United States destination.

NVG Filter Covers

90 days

Mount Accessories and NVG Lanyards

1 year

Mounts (Unless otherwise specified)

5 year

Mount with Electrical Systems

1 year

WARRANTY CLAIM AND SERVICE INFORMATION


For warranty claim or service work, WX must be contacted in the United States at (603) 431-1331 to assign a **Return Merchandise Authorization (RMA) / Service Call Number (SC)** prior to return shipment.

After an RMA/SC number is provided, WX will accept a package at the address below, clearly marked with the number assigned as follows:

Wilcox Industries Corp.
RMA # _____
25 Piscataqua Drive
Newington, NH 03801

The Wilcox G24 Mount and accessories must be securely packaged, accompanied by purchasing information, a letter including sender's name, address, daytime phone number, date of manufacture, lot number and a description of the problem or work to be performed.

(G24 Side View)

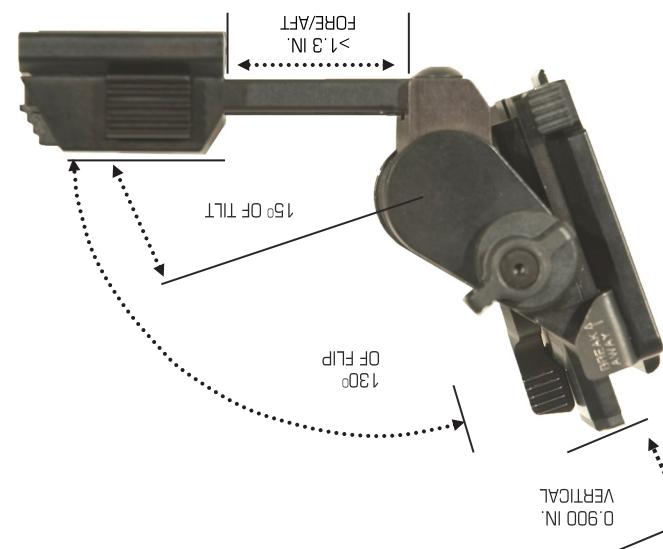

When performing breakaway operations that could cause entanglement,
ensure that the breakaway feature is not obstructed in any way.

WARNING

GENERAL SAFETY WARNINGS

OPERATION AND MAINTENANCE

INSTRUCTIONS FOR THE

WILCOX[®]

L4 G24

Family of Breakaway Lever Mounts
CAGE: 004F1



Manufactured by:

WILCOX[®]

Wilcox Industries, Corp.
25 Piscataqua Drive
Newington, NH 03801-7816

Phone: +1 888-8WILCOX
+1 603-431-1331
Fax: +1 603-431-1221




WWW.WILCOXIND.COM

For troubleshooting service questions,
contact Wilcox between 8am and 5pm EST.

© 2009-2022 Wilcox Industries Corp. All rights reserved. Printed in USA. US Patents 7,219,370, 8,739,313, 9,709,792, 9,775,395 and 10,264,840. Other US and foreign patents pending. Wilcox[®], Mount Up![®] and the Wilcox "X" Logo are federally registered trademarks of Wilcox Industries Corp. G24[™], Modular by Design[™] and "Our Customer's Life Depends on It"[™] are trademarks of Wilcox Industries Corp. All other trademarks and registered trademarks in this manual are the property of their respective companies. Specifications and other data are subject to change without notice. **EAR99: Export license not required.**

INSTALLATION



To Attach the L4 G37 Helmet Mount Interface (HMI) to the Helmet

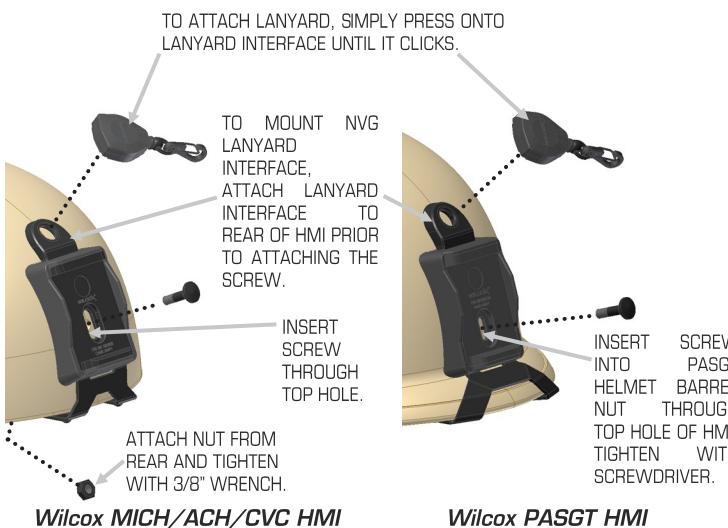

To Attach the NVG Mount:

(HMI DEPICTED)

1. SLIDE THE MOUNT RELEASE LEVER TO THE LEFT USING THE RIGHT THUMB TO UNLOCK THE MOUNT RELEASE.
2. INSERT THE TOP MOUNTING GUIDE.
3. ROTATE THE MOUNT DOWNWARD UNTIL IT SEATS.
4. SLIDE THE MOUNT RELEASE LEVER TO THE RIGHT USING THE RIGHT FOREFINGER TO SECURE.
5. PRESS THE MOUNT FIRMLY AT THE BASE TO SEAT, ALLOWING THE MOUNT TO ACHIEVE ITS POSITION.

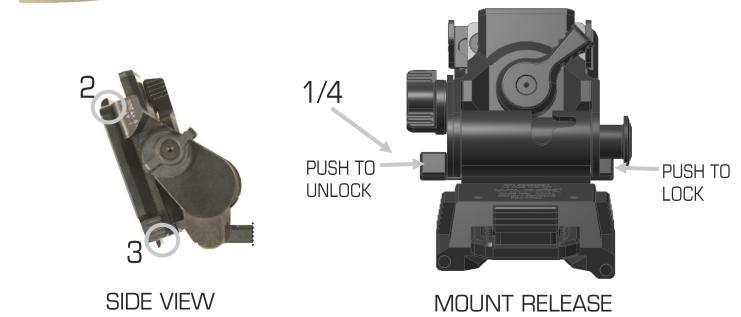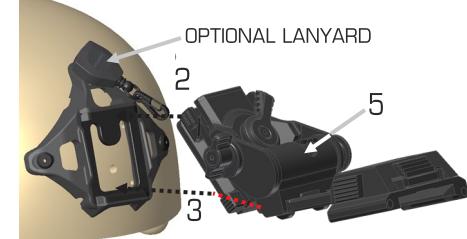

To Attach a NVG to the Wilcox NVG Mount:

DEPRESS NVG RELEASE
BUTTON TO RELEASE


TO MOUNT, INSERT THE DOVETAIL
SHOE AND PRESS UNTIL IT CLICKS

GENTLY PULL TO ENSURE THAT
THE NVG IS PROPERLY MOUNTED



OPERATION

To Adjust the Vertical Height of the Mount:

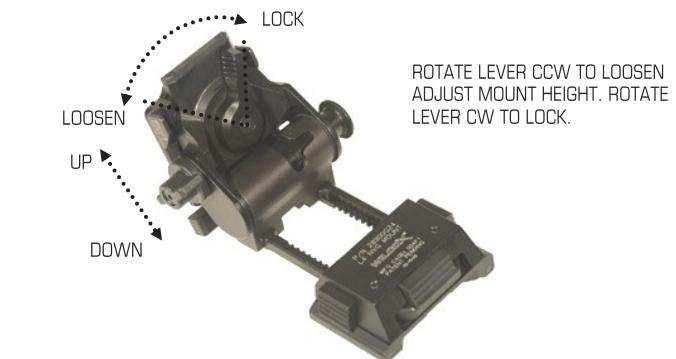

ROTATE LEVER CCW TO LOOSEN
ADJUST MOUNT HEIGHT. ROTATE
LEVER CW TO LOCK.

To Enable or Disable the Breakaway Feature:



WHEN ENABLING, SLIDE LEVER
THEN PRESS THE MOUNT FIRMLY
AT THE BASE TO SEAT, ALLOWING
THE SPRING LOADED TONGUE TO
ACHIEVE ITS POSITION ON THE
HMI.

To Adjust the Tilt Angle of the Mount:




ROTATE TILT ANGLE
ADJUSTMENT KNOB
CW OR CCW TO RAISE
ANGLE OR CCW TO
LOWER.

To Adjust the Fore/Aft Position of the NVG:



SIMULTANEOUSLY DEPRESS BOTH FORE/
AFT RELEASE BUTTONS WHILE MOVING
MOUNT FORWARD OR BACKWARD ON
THE CARRIAGE OF THE NVG MOUNT.


Force to Overcome:

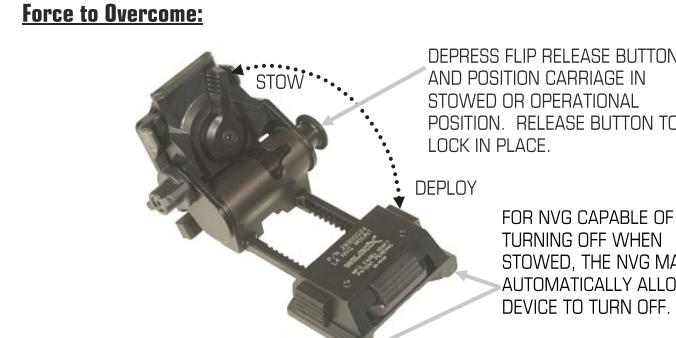

DEPRESS FLIP RELEASE BUTTON
AND POSITION CARRIAGE IN
STOWED OR OPERATIONAL
POSITION. RELEASE BUTTON TO
LOCK IN PLACE.

FOR NVG CAPABLE OF
TURNING OFF WHEN
STOWED, THE NVG MAGNETS
AUTOMATICALLY ALLOW THE
DEVICE TO TURN OFF.

To Attach the Wilcox Three-Hole HMI and (Optional) Lanyard to the Helmet

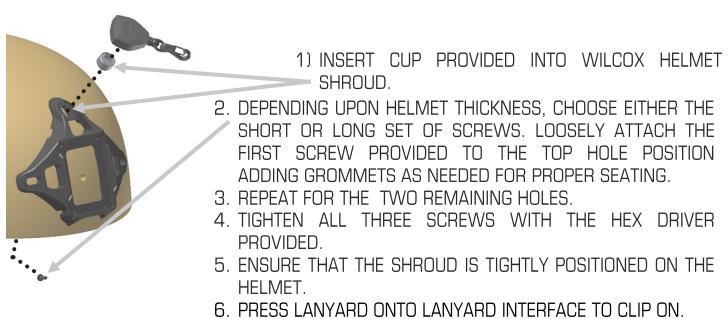

To Attach the (Optional) Ratchet Strap to the Helmet:

(MICH/ACH/CVC DEPICTED)



To Detach the (Optional) Ratchet Strap from the Helmet:

(MICH/ACH/CVC DEPICTED)

