




CLIMATE CONTROL INSTRUCTIONS

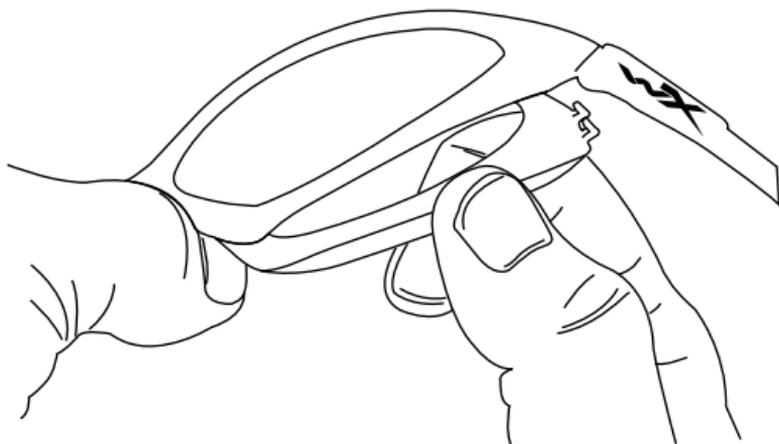

Gasket Replacement for Climate Control™ Series

- 1) Locate hooks or tabs on outside of gasket.
- 2) Locate square shaped holes on inside of frame.
[next to hinge]
- 3) Push hooks or tabs into holes on one side of frame.
[Make sure gasket is lined up to match nose bridge]
- 4) Repeat on opposite side of frame.

Gasket Removal for Climate Control™ Series

- 1) Grab outside edge of gasket, below the hinge, and pull straight out. Gasket should release.
- 2) Repeat on opposite side.

WILEYX USA: 1.800.776.7842 // 925.243.9810 // WILEYX.COM
WILEYX EUROPE LLC: +45 96 93 00 45 // WILEYX.EU

COPYRIGHT © 2014 WILEY X, INC. ALL RIGHTS RESERVED.

WILEY X, WX, BLACK OPS, logos, tag lines and product names are trademarks or registered trademarks (marcas registradas) of Wiley X, Inc. in the U.S. and other countries. Logos © 2007-2014 Wiley X, Inc. All rights reserved.