

**USER GUIDE** 


BDC SLUGGER™ RETICLE

## BDC SLUGGER™ RETICLE

The BDC (Bullet Drop Compensation) SLUGGER™ Reticle is designed to compensate for the trajectory of a specific ammunition.

Please note that the reticle is based upon ballistic information and may or may not produce these exact results based on a variety of variables such as:

- Actual Velocity (Ammunition manufacturers' information may not match the exact velocity out of your firearm. The best way to confirm velocity is to use a chronograph).
- Temperature
- Humidity

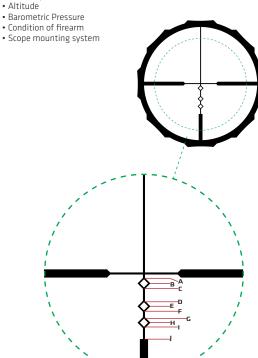



Get precise bullet drops for your reticle and ammunition. Use our FREE Crimson Trace Ballistic Calculator. \*Available for all Crimson Trace Reticles

> Crimson Trace® Ballistic Calculator Go to www.crimsontrace.com for more information.

Subtensions for yardages were calculated using the following variables. Note: all subtensions are calculated at MAX magnification.

- Gauge 12GA
- Muzzle Velocity (fps) 1900
- · Bullet Wt (gn) 250
- Ballistic Coefficient G1 0.190
- · Zero Range (vd) 50
- Temp (Fahrenheit) 59
- · Altitude (feet) 2500
- · Scope Height over bore (in) 1.75

SUBTENSION	YARDS	MOA
А	85	0.71"
В	100	1.21"
С	120	1.21"
D	140	3.50"
E	150	4.00"
F	160	4.50"
G	170	5.50"
н	175	6.00"
I	185	6.50"
J	200	8.00"



CRIMSON TRACE HEADQUARTERS
9780 SW FREEMAN DRIVE, WILSONVILLE, OR 97070
TELEPHONE: 800-442-2406 • FAX: 503-783-5334
CRIMSONTRACE.COM